



Valvola a saracinesca in ottone tipo pesante, a passaggio totale.
Volantino in acciaio verniciato.
Temperatura massima di esercizio: 80°C in assenza di vapore.
PN20.


Attacchi filettati F-F ISO 228/1

Brass full bore gate valve, heavy type.

Handle in painted steel.

*Maximum working temperature: 80°C in absence of steam
PN20*

Threads: ISO228/1: FxF

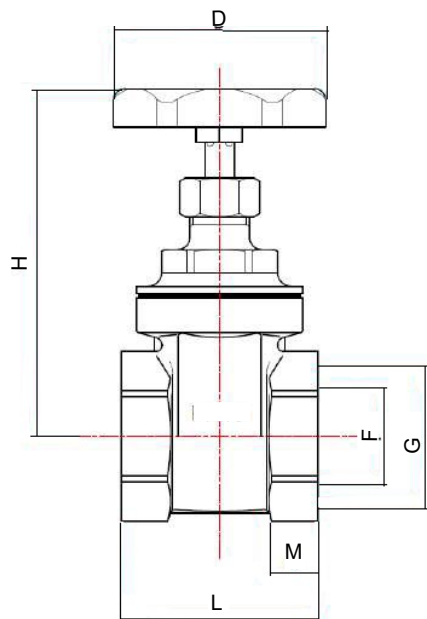

Dimensioni / Dimensions.

	SA005DSA	SA005ESA	SA005FSA	SA005GSA	SA005HSA	SA005ISA	SA005LSA	SA005MSA	SA005NSA
G	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
DN	15	20	25	32	40	50	65	80	100
L	43	47	51	58	60	66	74	81	99
H	68	76	92	110	125	145	177	196	230
D	45	50	55	60	70	80	100	100	120
F	15	19	24	32	37	48	58	71	91
M	10	11	13	14	14	16	17	14	22
PN	20	20	20	20	20	20	20	20	20

MATERIALI / MATERIALS

Corpo / Body	Ottone / Brass: (1/2" - 2") --> CW617N; (2"1/2 - 4")--> CB754S
Asta, ferma asta e premistoppa / Stem, stop ring and gland	Ottone / Brass: CW614N
Vitone / Bonnet	Ottone / Brass: CW617N
Disco / Wedge	Ottone / Brass: CB754N
Guarnizione corpo / Body gasket	Fibra / Fiber: MECSINT
Guarnizione asta / Stem packing	EPDM 80°Sh
Volantino / Handwheel	Acciaio verniciato / Painted steel

Scheda tecnica Art.	SA005DSA	REV.00 07/03/2023
---------------------	-----------------	-------------------