

**RUBINETTO A GALLEGGIANTE SILENZIOSO 1/2", CORPO OTTONE
PER ABBEVERATOIO**

Noiseless float tap 1/2" with brass body, for watering place.

ART. GA016DSA

Informazioni tecniche / Technical information




Rubinetto a galleggiante silenzioso con asta regolabile in ottone
Corpo in ottone sabbato. Per abbeveratoio

**Pressione massima di esercizio consigliata: 5bar
Temperatura massima dell'acqua consigliata: 60°C**

*Noiseless float valve with adjustable brass rod.
Sandblasted brass finishing. For watering place.*

**Maximum recommended working pressure: 5bar
Maximum recommended working temperature: 60°C**

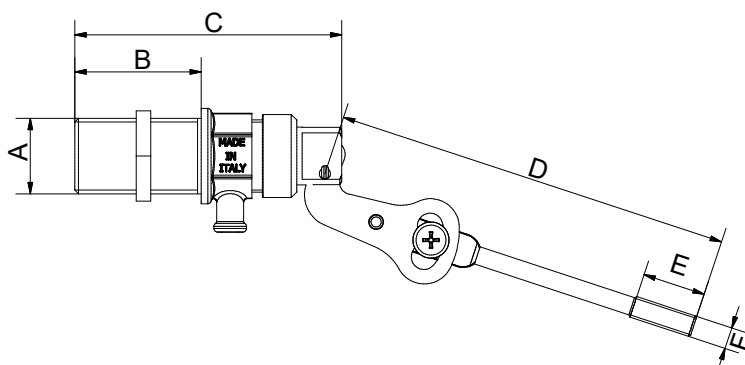

| Misure di ingombro - Overall dimensions (mm) | | | | | |
|--|----|----|-----|----|--------|
| A | B | C | D | E | F |
| 1/2" | 35 | 74 | 110 | 17 | 1/4" W |

Sfere consigliate - Recommended size balls

| DN | In Plastica / In Plastic | In Rame / In Copper |
|------|--------------------------|---------------------|
| 1/2" | 90 / 120 | 100 |

COMPONENTI / COMPONENTS

| | |
|---|---|
| Corpo / Body | Ottone / Brass: CW617N |
| Componenti in ottone / Brass components | Ottone / Brass: CW614N |
| Guarnizioni / Seals | SB - NBR |
| Sede / Seat | Acciaio inox / Stainless steel: AISI304 |

| | | |
|---------------------|-----------------|-------------------|
| Scheda tecnica Art. | GA016DSA | REV.00 14/03/2023 |
|---------------------|-----------------|-------------------|

